


LK-826 manual

Product Features

- 1.Suitable for metal tokens;
- 2.CPU control for accurate count. Characteristics: precise, quick;
- 3.Full-new structure design can solve the problem of stuck coin completely;
- 4.Recognize different sized coin . With indicator light;
- 5.Selectable output pulse width and accuracy;
- 6.Anti-cheating and anti-fishing methods effectively;
- 7.Circuit board adopts SMT technology with anti-fishing function;
- 8.More function setting options to meet the various requirement of customers.
(Such as: setting the coin/ score proportion, higher resolution mode, etc.)

Step for Usage




- 1.Adjust the sliding gear(with slightly press)to prevent misinjection of tokens with excessive diameter.
- 2.Take out the plastic coin from the slot, put your coin in;
- 3.According to your coin,select the sensitivity.If you require a high accuracy,adjust it to "precision".If some true coins were misjudged as false coins, adjust it to "normal";
- 4.According to machine's motherboard,select the output pulse switch
(25ms/50ms/100ms,usually use 50ms) ;
- 5.Install coin acceptor.it can be used after connecting power and signal wirress.

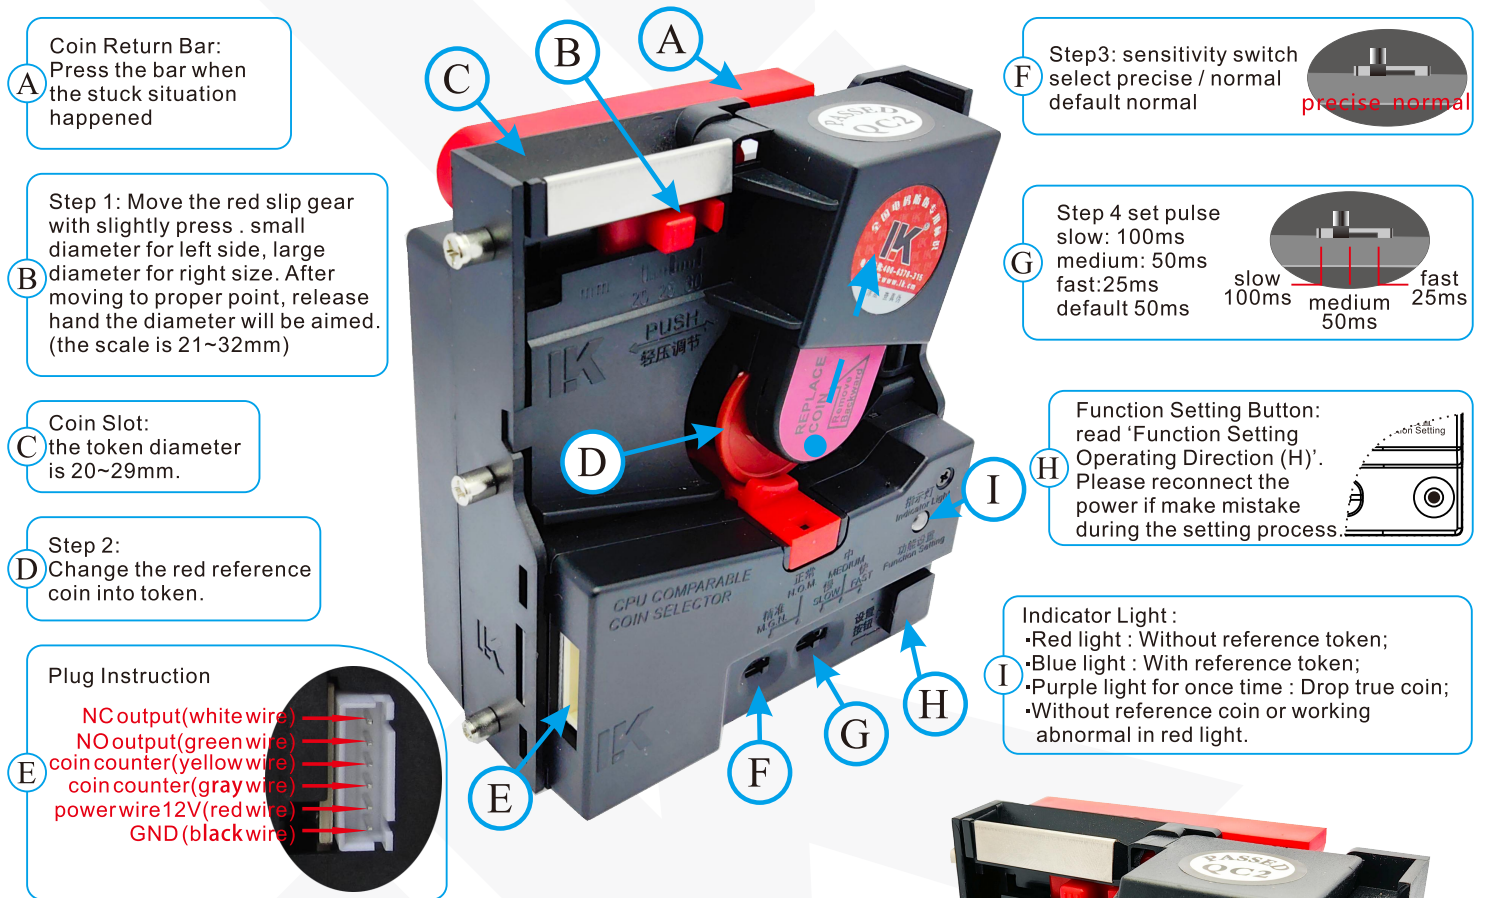

Communication circuit

When the coin acceptor detects "real coins". The circuit gives a normally closed pulse signal and a normally open pulse signal.
(The pulse signal width can be selected as 25ms/50ms/100ms)


The circuit output of this product is a triode collector or MOS tube drain open output , When it is used,users are advised to use optocouplers to receive signals when designing the interface circuit (see Figure 2).

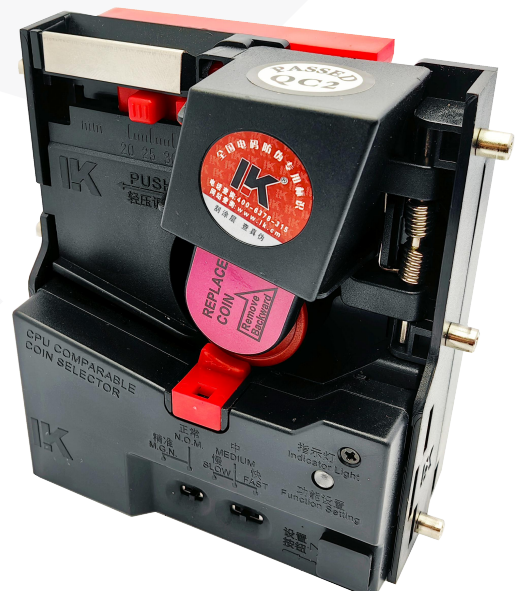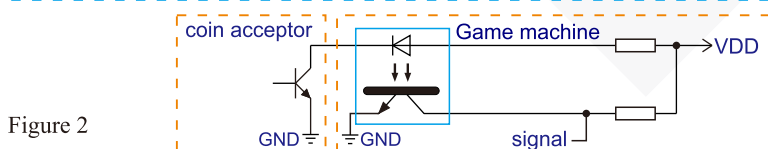

Product Size

Unit: mm

Note: Band () is the relative size of the coin slot

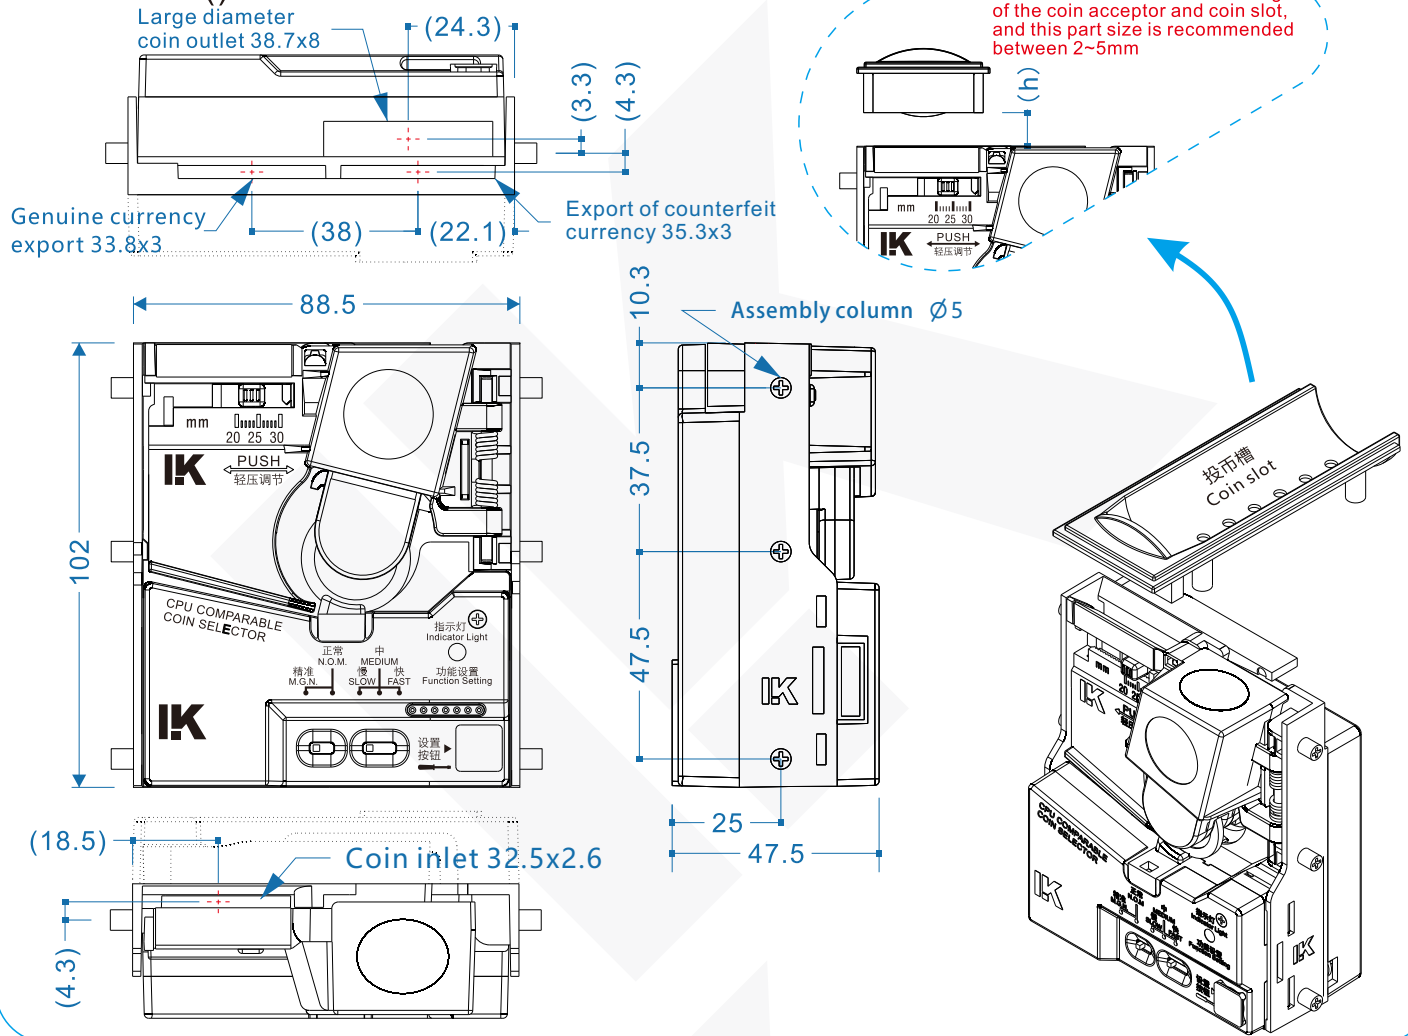

Common abnormalities handling

- A. Card currency
 1. Check whether the coin slot of the machine is aligned with the coin slot of the coin dispenser;
 2. Check if the coin slot of the machine and the coin slot of the coin dispenser are skewed.
- B. Coin not passed
 1. If there is poor contact in the coin power outlet;
 2. If the wiring is correct;
 3. If there is a foreign body in the coin track;
 4. If power supply 12V is normal;
 5. If the out mouth of coin is smooth;
 6. If prototype is fit correctly;
 7. If mounting depth is enough;
 8. If there is a foreign body in the coin track, such as electric eye position is blocked.
- C. Coin not score
 1. If SW1 NO/NC is set matched;
 2. If SW2 plus width is matched;
 3. If the signal is connected well, if connection method is correct;
 4. Coin signal and open collector output, if the target board is connected with pull-up resistor.
- D. Coin not smooth
 1. Adjust precise switch, precision stall: more stringent selection, commonly normal stall;
 2. If prototype is fit correctly;
 3. If coin slot is smooth, such as hopper tank depositing port and slot machine outlet slot are aligned;
 4. Adjust VR knob, clockwise screening more relaxed, counterclockwise more strict.
- E. Accept false coin
 1. Adjust precise switch to precision stall;
 2. Counterclockwise adjust VR knob (counterclockwise more strict)
- F. Code mode doesn't move
 1. If the wiring is correct (An end of the code table is connected with code table line, the other end of DC+12V);
 2. If the code mode is bad;
 3. Cable resistance is too large, resulting in power is below standard;
 4. The power supply voltage and rated voltage code table required are the consistent.

Basic parameters

Operating voltage		DC12V $\pm$ 10%
Standby currency		$\leq$ 60mA
Operating currency (Maximum current)		$\leq$ 800mA
Suggested Input		12V $\overline{\text{---}}$ 1.5A
Operating temperature		-15 $^{\circ}$ C~65 $^{\circ}$ C
Output mode		OC.
Output signal		25ms/50ms/100ms
Coin diameter		20~29mm
Coin thickness		1.2~2.3mm
Individual packaging	Meas	106*60*115mm
	Gross weight	without wire 233g
		with wire 255g
Carton packaging	Package	60PCS/SET
	Meas	440*320*370mm
	Gross weight	without wire 14.62KG
		with wire 16.00KG

If product technology improved, it will be edited in the new manual without notice. The ultimate interpretation of this manual is up to Guangzhou Likang Electronic Technology Co., Ltd.

LK Likang Electronic Technology Co., Ltd.
www.lkchina.asia

Function Setting Operating Direction (H)

Function	High Resolution Mode ^①	More High Resolution Mode ^②	Coin/ Score Mode setting ^③	Restoring Factory Settings
Coin Status	YES			NO
Enter Menu	Pressing three seconds to enter the selection menu (the indicator light changes from flashing purple light to constant red light before proceeding to the next step)			
Enter Sequence	Short press 1 time	Short press 2 times	Short press 3 times	Short press 1 time
	After pressing it, wait for 3 seconds to enter the corresponding setting (the color of the indicator changes every time you press it)			
Operation description	More accurate coin selection . Automatically set and exit after entering.	Sensitivity switch must be set to precise position , dropping 10 real coins firstly, then dropping 10 fake coins . After the coin is inserted or there is no operation for 1 minute, Coin acceptor will automatically exit the setting .	After entering this mode, please drop coins. For example, when dropping five coins, the record will be 5 scores for 1 coin.Coin acceptor will exit this mode while long pressing any button for 3 seconds or without operation for 1 minutes.	Parameter restore to factory settings (the setting of Coin& Score Mode setting cannot be restored by restoring factory settings) After entering, it will automatically restore the settings and exit.
	Purple light flashes →blue light on (setting completed)	Purple light flashes→ Purple light off→ Drop 10 real coins → Purple light flashed then off→Drop 10 fake coins →Purple light flashed→Blue light on (setting completed)	Purple light flashes→ Purple light off→ color of each coin changes (blue and red alternate) →long press for 3 seconds or 1 minute without operation (the purple light flashes)→Blue light on (setting completed)	urple light flashes→ Red light flashes (setting completed)

Please plug in again if you make mistakes during the operation!!!



Remark 1,2: Under the high recognize mode, if material of the token have big difference with the reference coin will cause poor operation. Therefore, the small difference material token or using default setting is recommended.
Remark 3:For example, coin-score set in 1:100, the time for showing score under slow/regular/quick is 20/10/5 seconds. Due to the Score will show up slow will easy make user confusing, LK team recommend the coin-score setting should not beyond 1:20.

If product technology improved, it will be edited in the new manual without notice. The ultimate interpretation of this manual is up to Guangzhou Likang Electronic Technology Co.,Ltd.

LK Likang Electronic Technology Co.,Ltd.
www.lk.cn